

www.lightingtechnologies.com.au



**LIGHTING
TECHNOLOGIES
AUSTRALASIA**

LED and Solar
Advanced Lighting Systems



**LIGHTING
TECHNOLOGIES
AUSTRALASIA**

LED and Solar
Advanced Lighting Systems

Manufacturers and Importers of Advanced Lighting Technology Systems
Lighting Technologies Australasia Pty Ltd.
info@lightingtechnologies.com.au

AURA SERIES

LED GARDEN LIGHT


30W-150W

Product Description




Thermal Management


Structure is optimized by advanced FEA technology. Achieving longer lifespan at best cost-efficiency.

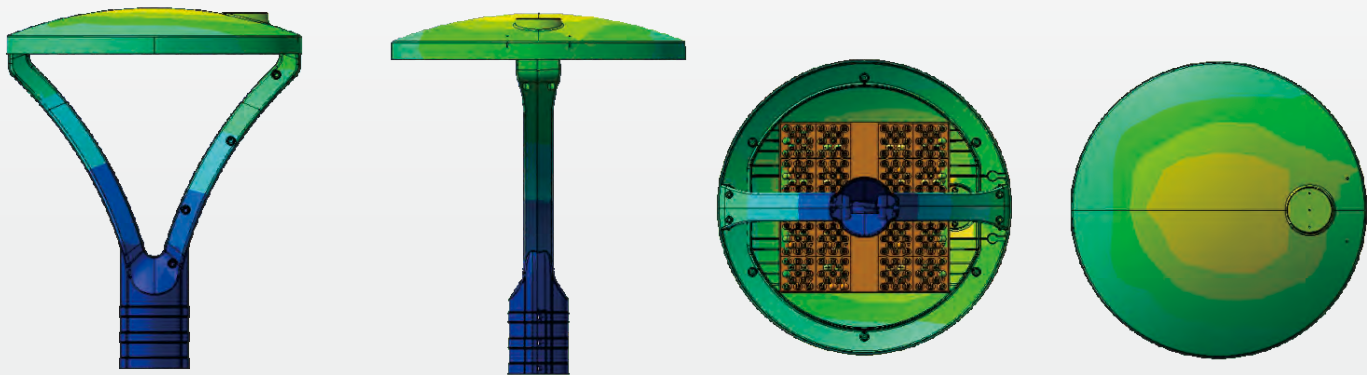

Thermal Conductivity

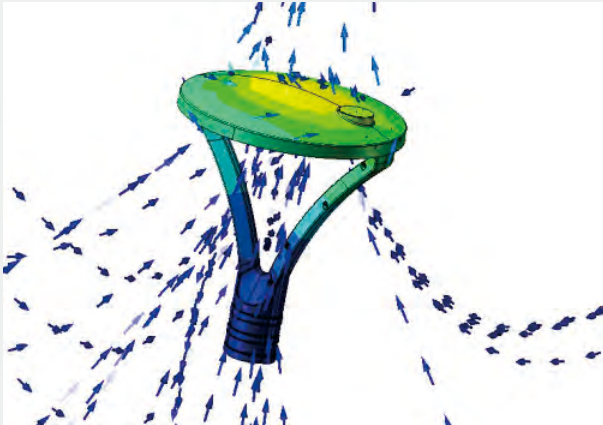


Thermal Air Convection

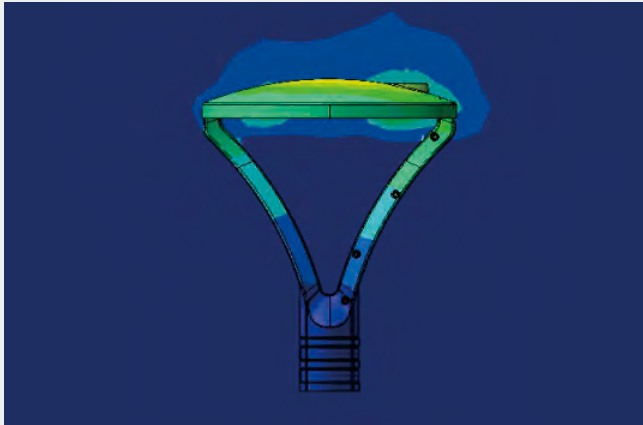

Thermal Effects to Air

Detail Display

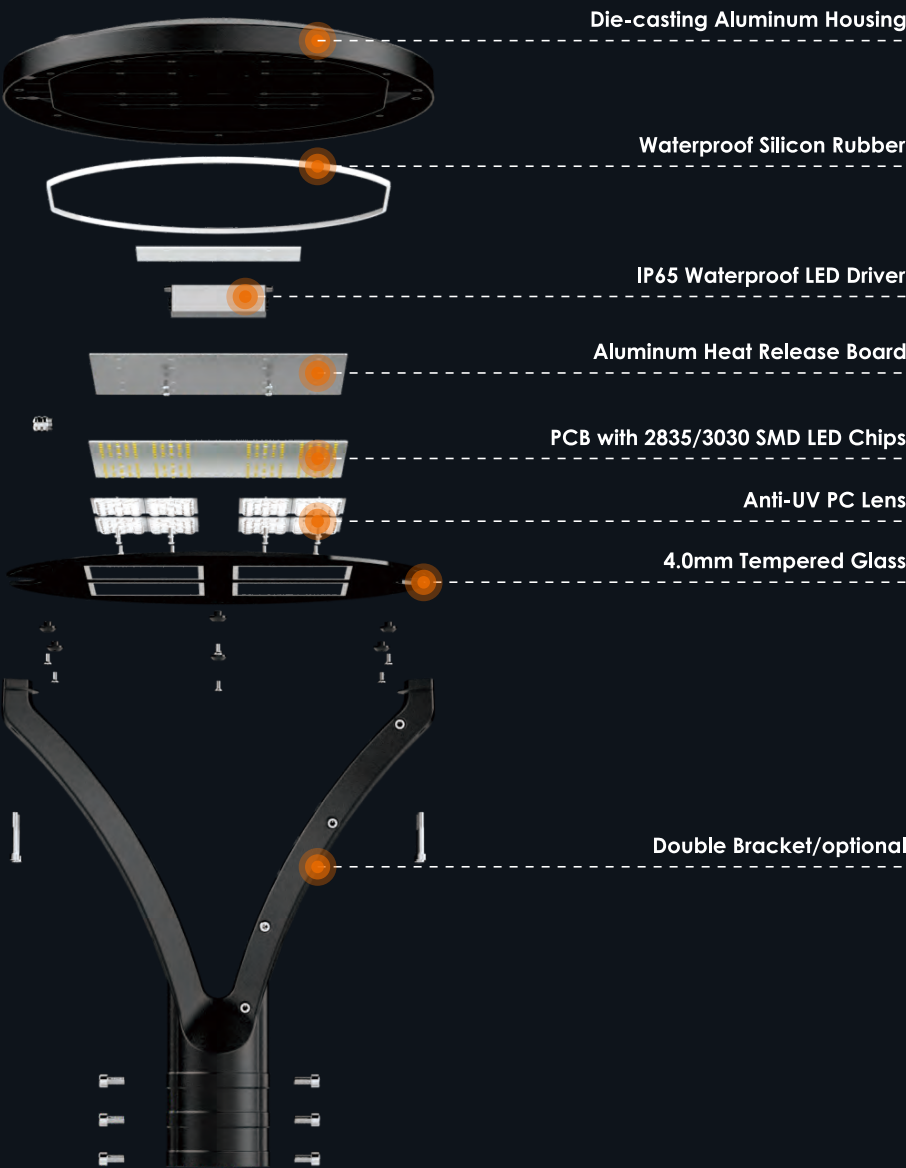

OPTIONAL



Adjustable

Single Bracket

Double Bracket

APPLICATIONS

Features: Dual Bracket Design, High-Brightness Lighting, Waterproof & Durable, Smart Control.
Applications: Ideal for courtyard lighting, gardens, and parks, creating a warm and safe outdoor environment.


Technical Parameters

Model No.	LTA-CY072030	LTA-CY073040	LTA-CY074050	LTA-CY075060	LTA-CY076070	LTA-CY077080	LTA-CY078090
Power	30W	40W	50W	60W	70W	80W	90W
Material	Die-cast Aluminum + PC Lens + Glass						
Luminous Efficacy	130-160lm/W						
Beam Angle	90° /120° /T2						
PF	>0.95						
CCT	3000-6500K						
IP	IP65						
CRI	Ra>70						
Service Life	50000H						
Lightning Protection Level	4KV-6KV-10KV						
Input Voltage	120-277V						
Product Dimensions	423×520mm						
Net Weight	5.2kg						
Packaging Dimensions	480*480*600mm						


Model No.	LTA-CY079100	LTA-CY080110	LTA-CY081120	LTA-CY082130	LTA-CY083140	LTA-CY084150
Power	100W	110W	120W	130W	140W	150W
Material	Die-cast Aluminum + PC Lens + Glass					
Luminous Efficacy	130-160lm/W					
Beam Angle	90° /120° /T2					
PF	>0.95					
CCT	3000-6500K					
IP	IP65					
CRI	Ra>70					
Service Life	50000H					
Lightning Protection Level	4KV-6KV-10KV					
Input Voltage	120-277V					
Product Dimensions	423×520mm					
Net Weight	5.2kg					
Packaging Dimensions	480*480*600mm					



Light Distribution Curve

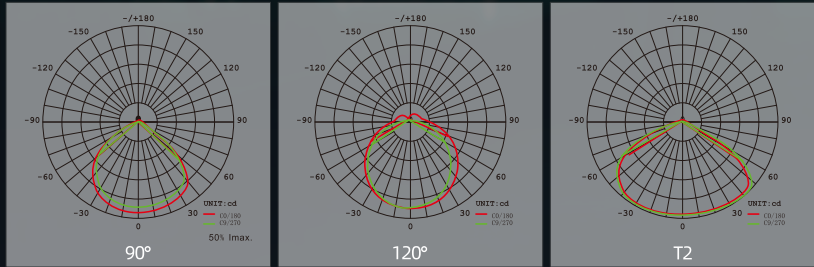

Dimension Drawing

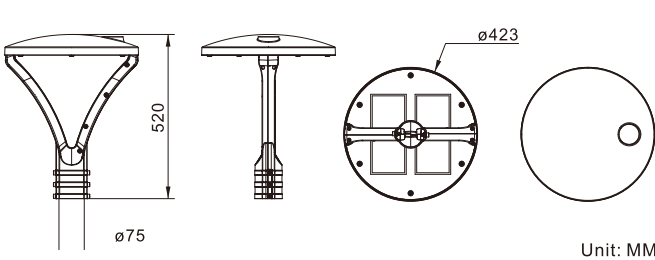

Installation Method



APPLICATIONS

Features: Sleek Single-Arm Design, High-Brightness Lighting, Energy-Saving & Eco-Friendly, Easy Installation.
Applications: Ideal for courtyard lighting, villas, and patios, enhancing both aesthetic appeal and functionality of outdoor spaces.


Technical Parameters

Model No.	LTA-CY072030	LTA-CY073040	LTA-CY074050	LTA-CY075060	LTA-CY076070	LTA-CY077080	LTA-CY078090
Power	30W	40W	50W	60W	70W	80W	90W
Material	Die-cast Aluminum + PC Lens + Glass						
Luminous Efficacy	130-160lm/W						
Beam Angle	90° /120° /T2						
PF	>0.95						
CCT	3000-6500K						
IP	IP65						
CRI	Ra>70						
Service Life	50000H						
Lightning Protection Level	4KV-6KV-10KV						
Input Voltage	120-277V						
Product Dimensions	423×520mm						
Net Weight	5.2kg						
Packaging Dimensions	480*480*600mm						


Model No.	LTA -CY079100	LTA -CY080110	LTA -CY081120	LTA -CY082130	LTA -CY083140	LTA -CY084150
Power	100W	110W	120W	130W	140W	150W
Material	Die-cast Aluminum + PC Lens + Glass					
Luminous Efficacy	130-160lm/W					
Beam Angle	90° /120° /T2					
PF	>0.95					
CCT	3000-6500K					
IP	IP65					
CRI	Ra>70					
Service Life	50000H					
Lightning Protection Level	4KV-6KV-10KV					
Input Voltage	120-277V					
Product Dimensions	423×520mm					
Net Weight	5.2kg					
Packaging Dimensions	480*480*600mm					



Light Distribution Curve

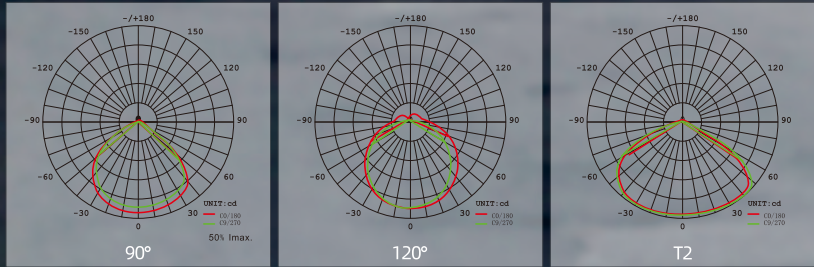

Dimension Drawing

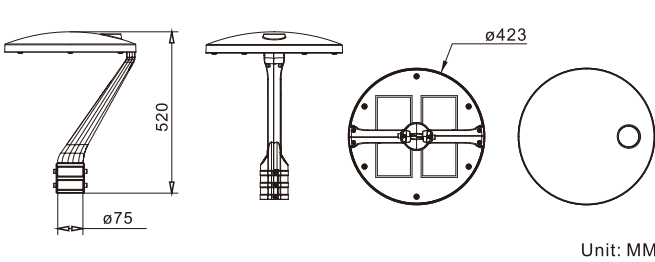

Installation Method



APPLICATIONS

Features: Adjustable Angle Design, Multiple Lighting Modes, Waterproof & Durable, Smart Control.
Applications: Suitable for courtyard landscaping, outdoor gatherings, and nighttime security lighting, providing flexible lighting effects.


Technical Parameters

Model No.	LTA-CY072030	LTA-CY073040	LTA-CY074050	LTA-CY075060	LTA-CY076070	LTA-CY077080	LTA-CY078090
Power	30W	40W	50W	60W	70W	80W	90W
Material	Die-cast Aluminum + PC Lens + Glass						
Luminous Efficacy	130-160lm/W						
Beam Angle	90° /120° /T2						
PF	>0.95						
CCT	3000-6500K						
IP	IP65						
CRI	Ra>70						
Service Life	50000H						
Lightning Protection Level	4KV-6KV-10KV						
Input Voltage	120-277V						
Product Dimensions	423×520mm						
Net Weight	5.2kg						
Packaging Dimensions	480*480*600mm						


Model No.	LTA-CY079100	LTA-CY080110	LTA-CY081120	LTA-CY082130	LTA-CY083140	LTA-CY084150
Power	100W	110W	120W	130W	140W	150W
Material	Die-cast Aluminum + PC Lens + Glass					
Luminous Efficacy	130-160lm/W					
Beam Angle	90° /120° /T2					
PF	>0.95					
CCT	3000-6500K					
IP	IP65					
CRI	Ra>70					
Service Life	50000H					
Lightning Protection Level	4KV-6KV-10KV					
Input Voltage	120-277V					
Product Dimensions	423×520mm					
Net Weight	5.2kg					
Packaging Dimensions	480*480*600mm					



Light Distribution Curve

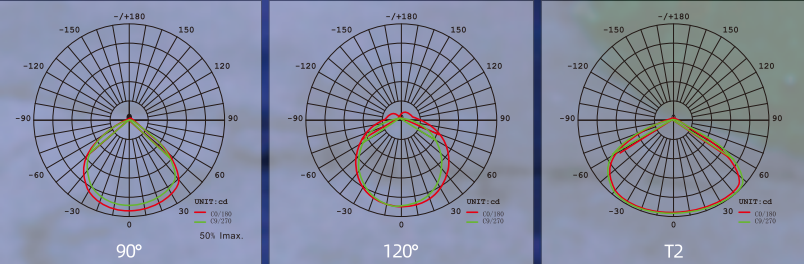

Dimension Drawing

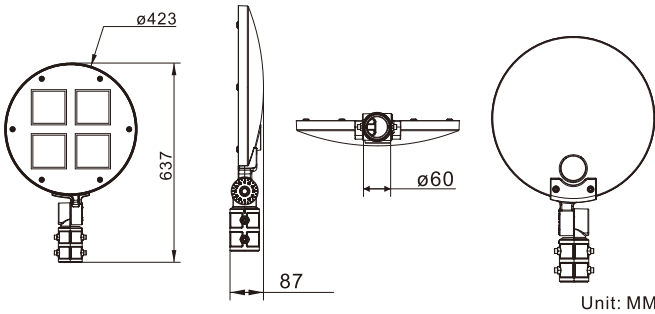

Installation Method





Quality Assurance

1. All LED courtyard lights are guaranteed by the manufacturer to be free from defects in materials and workmanship for 3 or 5 years (as per the sales contract).
2. The warranty shall be void if the product is modified, installed, or used improperly, damaged by accident or negligence, or if any parts are incorrectly installed or replaced by the user.
3. During the warranty period, if the product fails under normal environmental conditions and applications, we shall, at our discretion, repair or replace it free of charge.



Cautions

1. Installation must be performed by a professional electrician.
2. Do not disassemble the product. Risk of hazard.
3. Do not stare at the light with the naked eye. Harmful to eyes.
4. For outdoor lighting, cable terminals must be waterproofed.

